


Electric Spring Return Valve Assemblies



WESLEY VALV CO.





Electric Operated Butterfly Valves 2 to 16 Inches

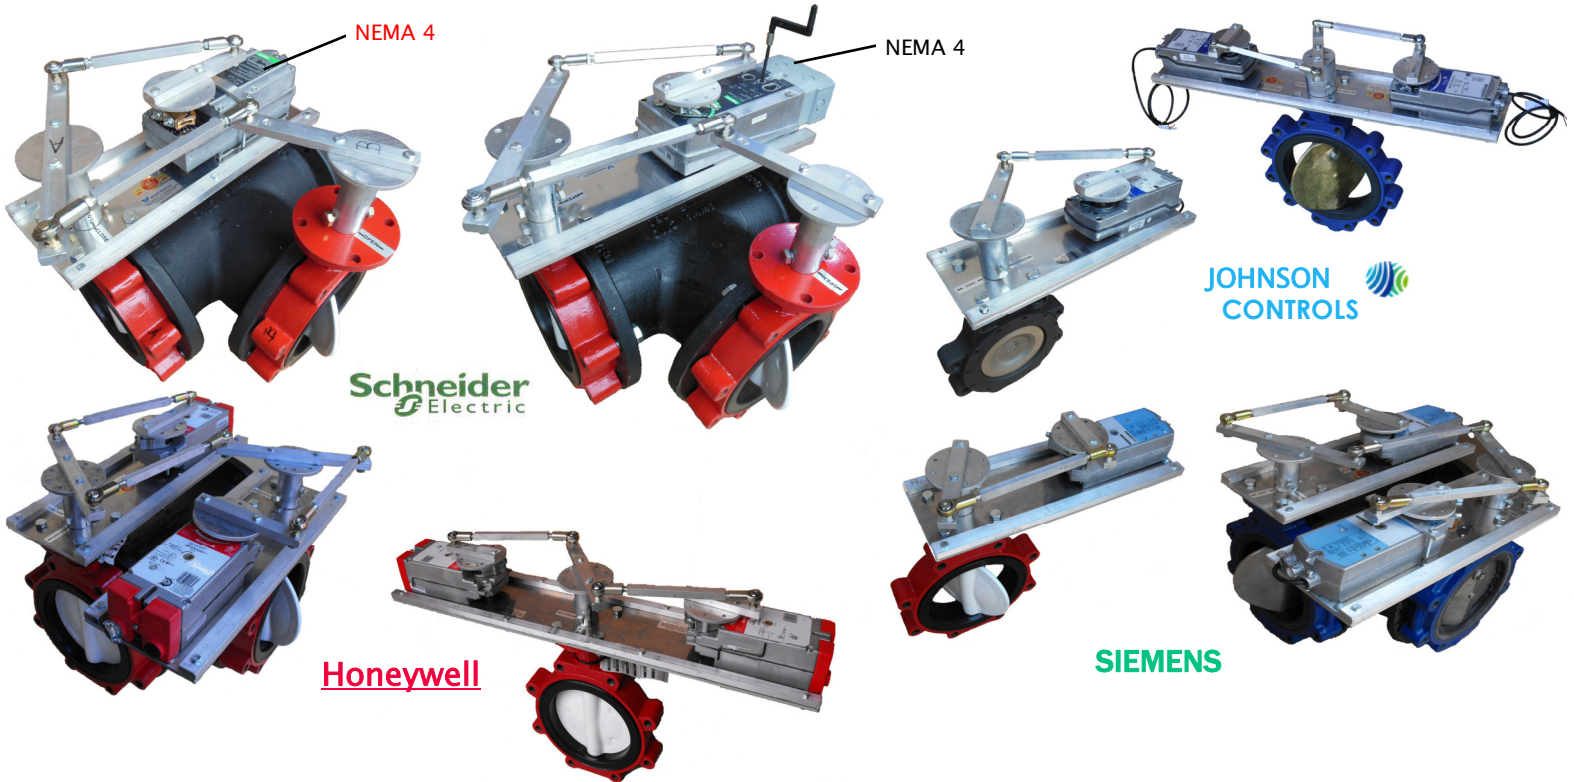


Valve Body: Ductile Iron Body for use with 125 or 150 lb. ASA Flanges, E.P.D.M. liner, Nylon coated or Stainless Steel Disc, and stainless steel shaft. High Performance Valve Assemblies are also available with Spring Return Actuators.

Actuator: Actuators will operate from modulating or two-position control signals. Direct Coupled actuators are mounted remotely to provide the most torque and modulating Resolution. 24 VAC to 230 VAC Actuators are available for most of the manufacturers shown.

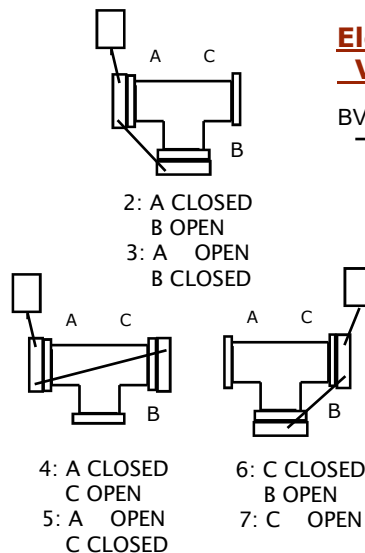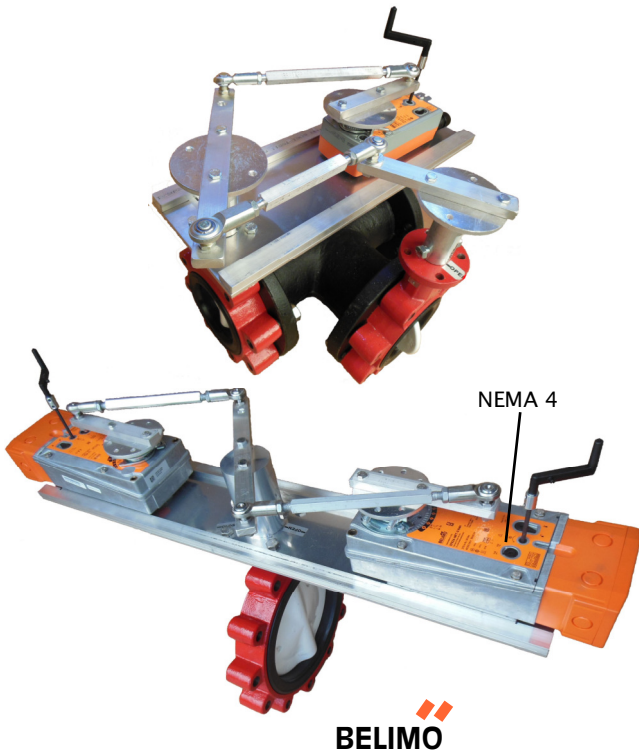

Electric Direct Coupled Actuator Valve Assembly Part Number

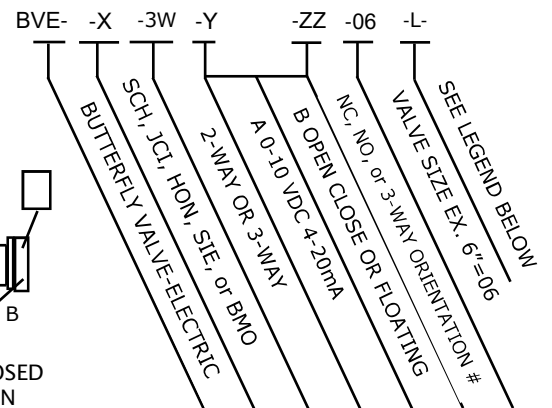

LEGEND

WP = NEMA 4 (Schneider & Belimo)
 VBI = Visual Beacon Indicator
 AUX = Actuator Auxiliary Switch
 RF = Retrofit Kit
 B = Bray, P = Pratt

3-WAY VALVE ORIENTATIONS