


# PRODUCT SELECTION ORDER INFORMATION



WESLEY VALVE CO.



## Pneumatically Operated Butterfly Valves 2 to 16 Inches Complete with Commercial 20 PSI Pneumatic Actuators

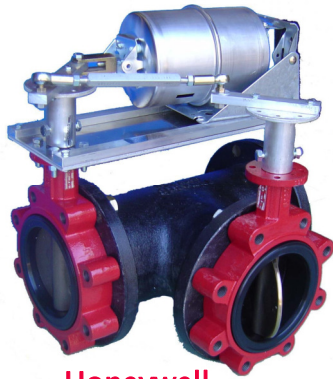

Honeywell




JOHNSON CONTROLS



Also Available  
in Electric

Johnson Controls  
V5650 Replacement

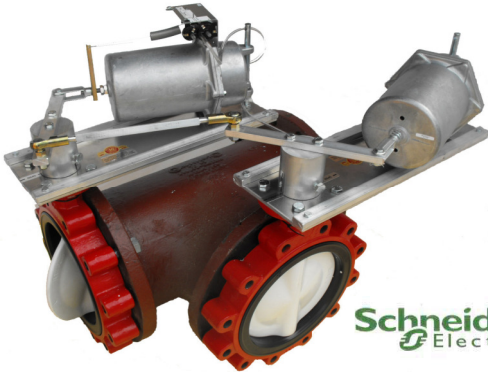

Schneider  
Electric




SIEMENS

**Valve Body:** Ductile Iron Body for use with 125 or 150 lb. ASA Flanges, E.P.D.M. liner, Stainless Steel disc or nylon coated disc, and Stainless Steel shaft.

**Actuator:** Operates from any 0-25# compressed air signal including standard pneumatic remote bulb, room type thermostat, or Electronic/Pneumatic Transducer


**Valve Close-Off:** Motorized butterfly valves offer a distinct advantage for leak-tight shut-off against system pressure.

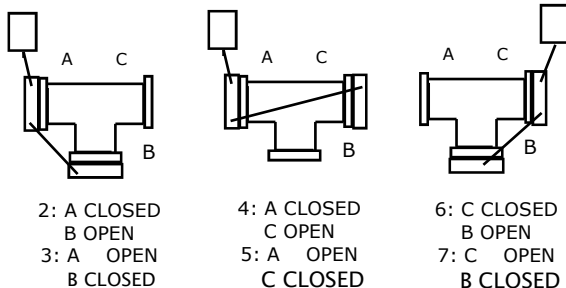

### 3-WAY VALVE ORIENTATIONS

Orientation is based on the position of valve ports with zero air pressure on actuator.

### Pneumatic Valve Assembly Part Number

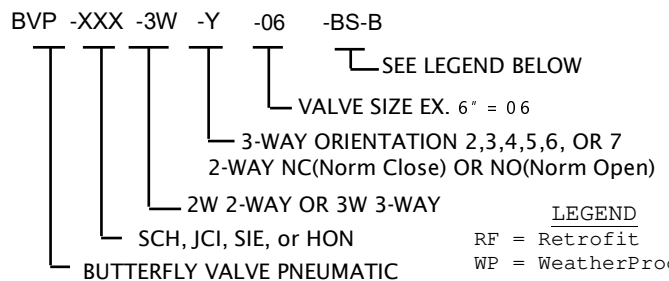

#### LEGEND

RF = Retrofit  
WP = WeatherProof  
BS = Valve Bump Switch  
B = Bray, P = Pratt