


YORK YVWA SCREW CHILLER



*Locate Chiller Head Press Valve
in Condenser Water Return Line*

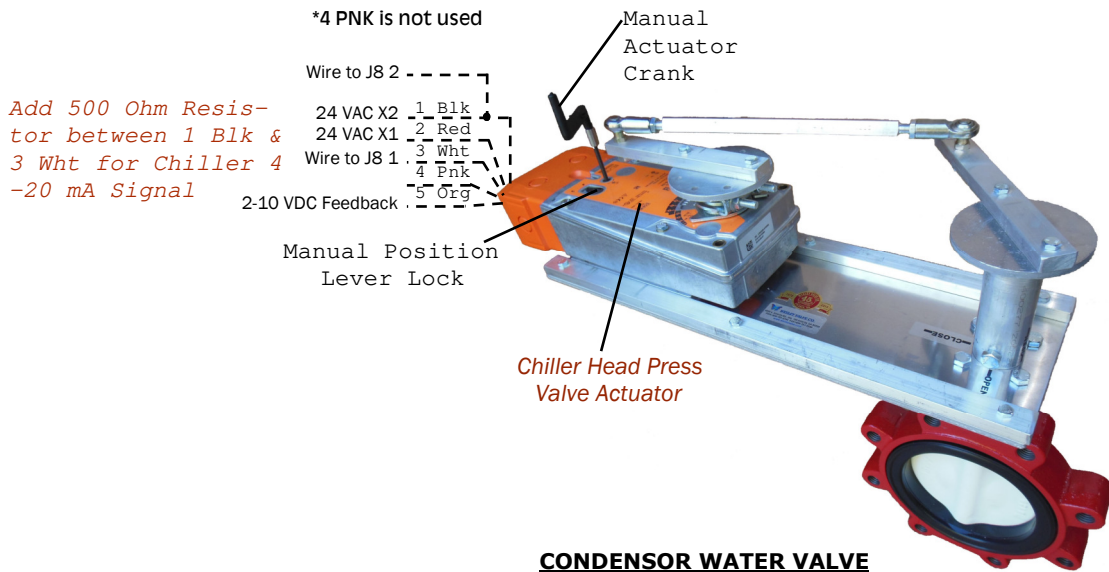

ACTUATOR HAS 4 TO 1 LEVER OR TORQUING ADVANTAGE


90 DEG ACTUATOR TO 60 DEG VALVE ROTATION OR A 1.5 TO 1 RATIO INCREASES THROTTLING DISC REPOSITIONS



WESLEY VALVE CO.

MFGRS OF AUTOMATED BUTTERFLY VALVES
3229 North L Street
Pensacola, FL 32505
PHN: (404) 351-8744 FAX: (404) 351-9340
www.wesleyvalve.com

YORK YCRL LIQUID SCROLL CHILLER

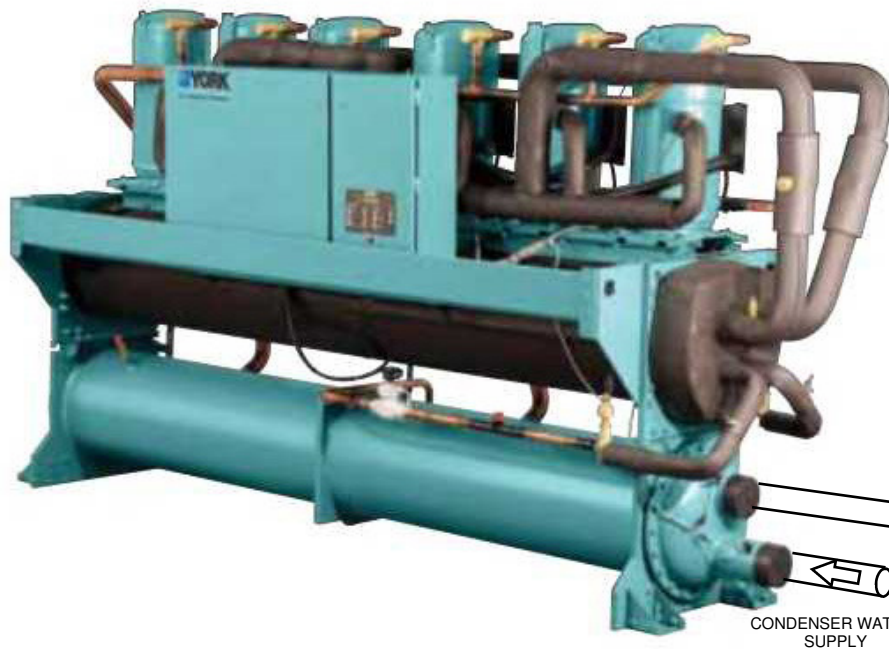

Separate 120 VAC
Or 24 VAC Power
Supply Required

CONDENSOR WATER VALVE LOCATION

CONDENSOR WATER
RETURN

CONDENSOR WATER
SUPPLY

*4 PNK is not
used


Wire to J15 3 - - - - -
24 VAC X2 1 Blk
24 VAC X1 2 Red
Wire to J15 7 3 Wht
4 Pnk
2-10 VDC Feedback 5 Org

Add 500 Ohm Resistor
between 1 Blk &
3 Wht for Chiller
4-20 mA Signal

Manual Position
Lever Lock

Chiller Head Press
Valve Actuator

Manual
Actuator
Crank

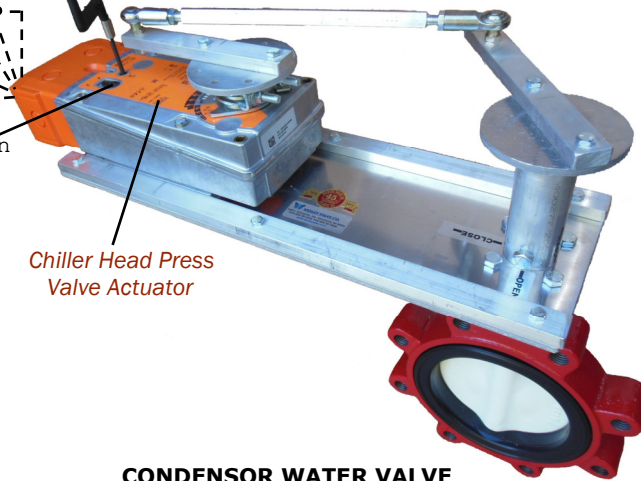

CONDENSOR WATER VALVE

ACTUATOR HAS 4 TO 1 LEVER

90 DEG ACTUATOR TO 60 DEG
VALVE ROTATION OR A 1.5 TO
1 RATIO INCREASES THROT-
TLING DISC REPOSITIONS



WESLEY VALVE CO.

MFGRS OF AUTOMATED BUTTERFLY VALVES

3229 North L Street

Pensacola, FL 32505

PHN: (404) 351-8744 FAX: (404) 351-9340

WWW.WESLEYVALVE.COM