


WIRING FOR VALVE ASSEMBLIES WITH BELIMO
DIRECT COUPLED NON SPRING RETURN ACTUATORS

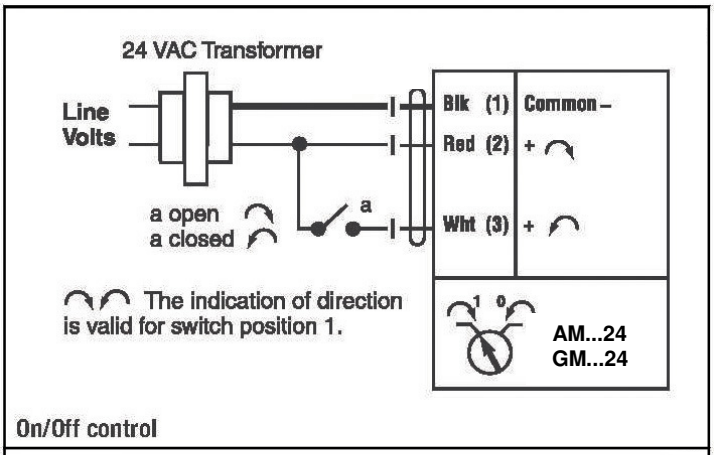


On/Off control

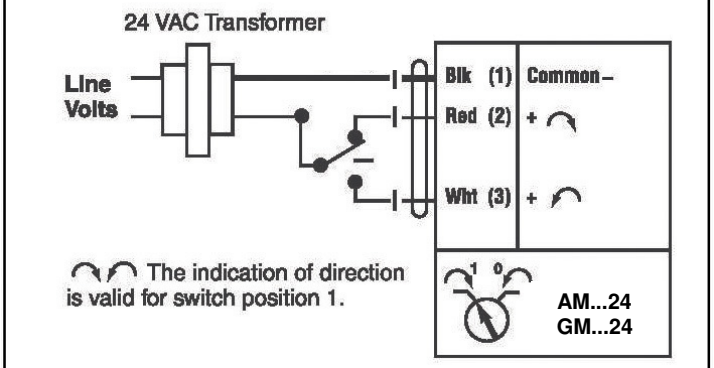


Floating Point or On/Off control

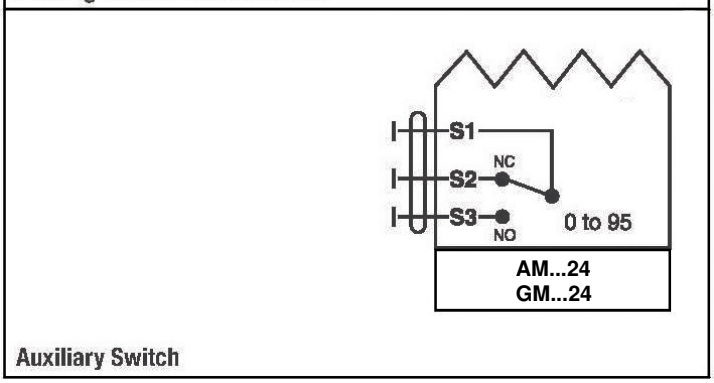

Auxiliary Switch

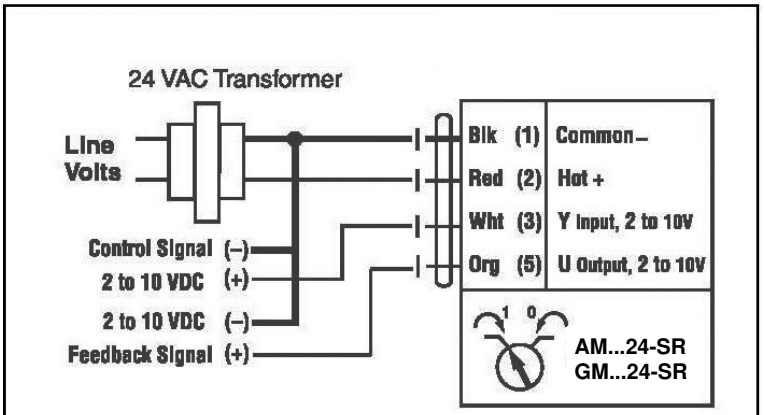


2 to 10 VDC control

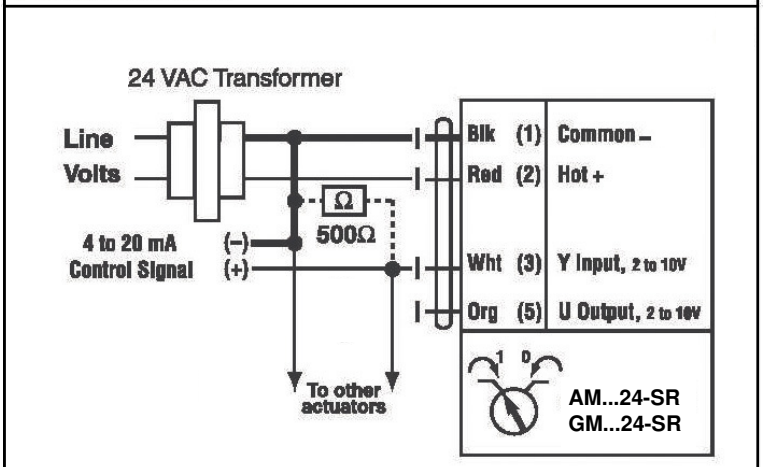


4 to 20 mA control

2-POSITION & FLOATING ACTUATOR WIRING

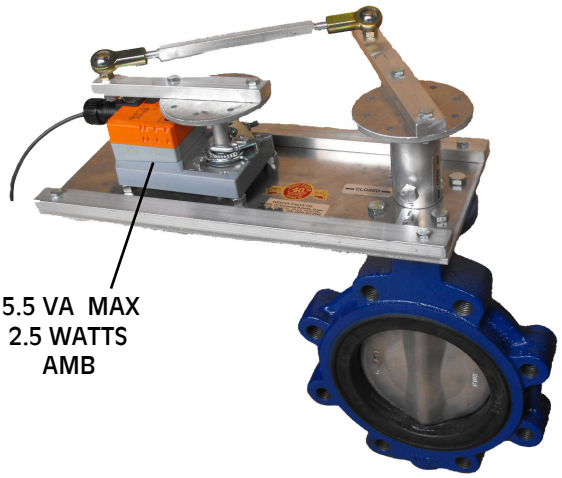


MODULATING ACTUATOR WIRING

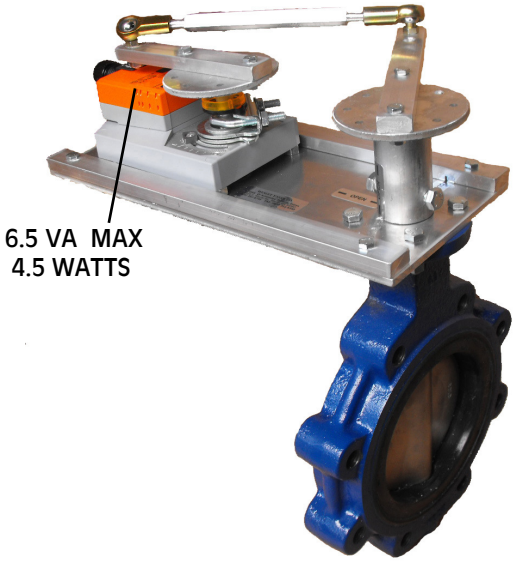


WESLEY VALVE CO.
MFGRS OF AUTOMATED BUTTERFLY VALVES
PHN: (404) 351-8744 FAX: (404) 351-9340
www.wesleyvalve.com

WIRING FOR VALVE ASSEMBLIES WITH BELIMO
DIRECT COUPLED SPRING RETURN ACTUATORS

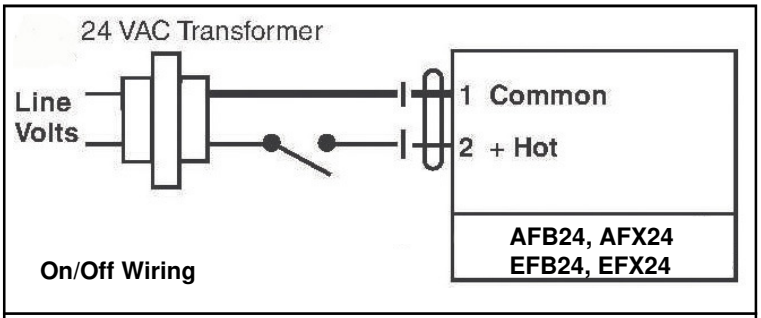


On/Off Wiring

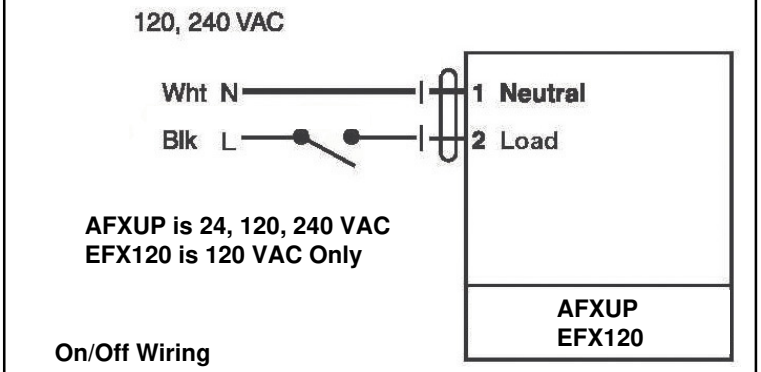

AFXUP is 24, 120, 240 VAC
EFX120 is 120 VAC Only


On/Off Wiring

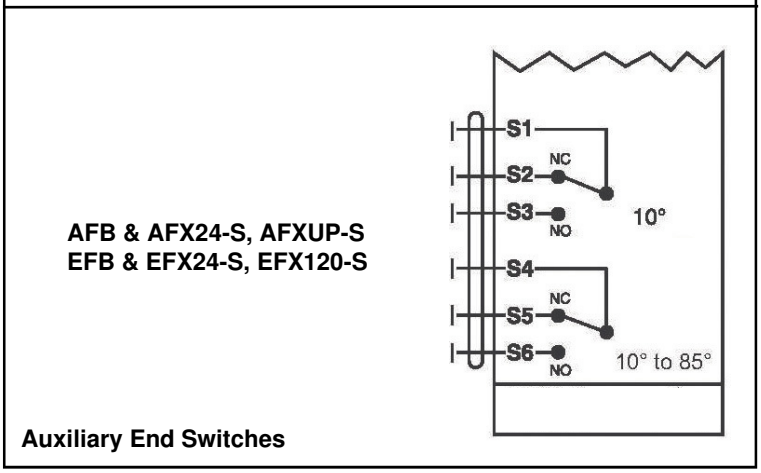


AFB & AFX24-S, AFXUP-S
EFB & EFX24-S, EFX120-S

Auxiliary End Switches

2-POSITION ACTUATOR WIRING

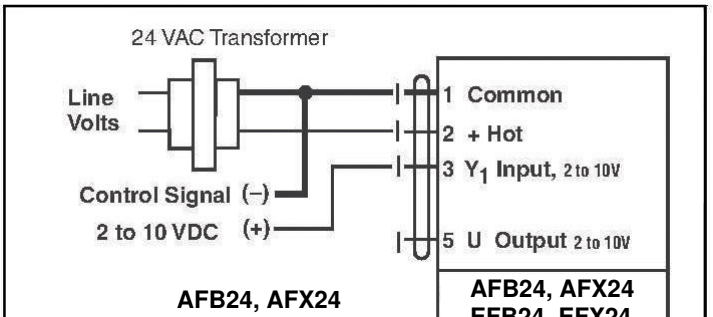


2 to 10 VDC control

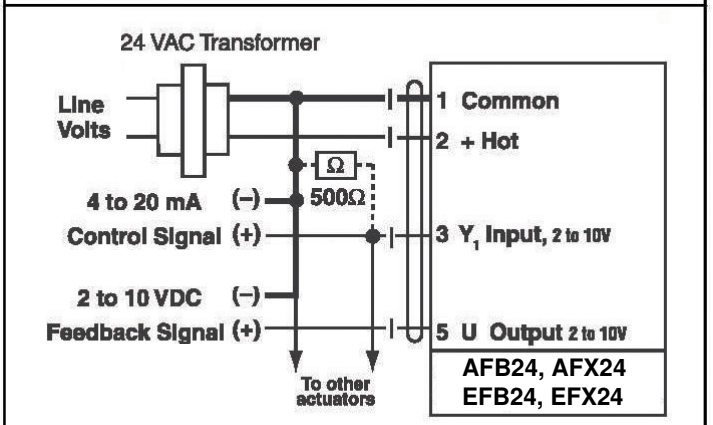



4 to 20 mA control with 2 to 10 VDC feedback output

MODULATING ACTUATOR WIRING

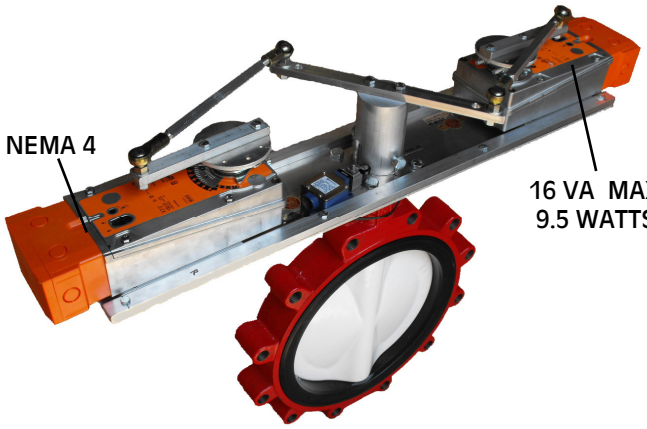

EFB & EFX Actuators add -N4 to the part number to make it NEMA 4 for Outdoor Use

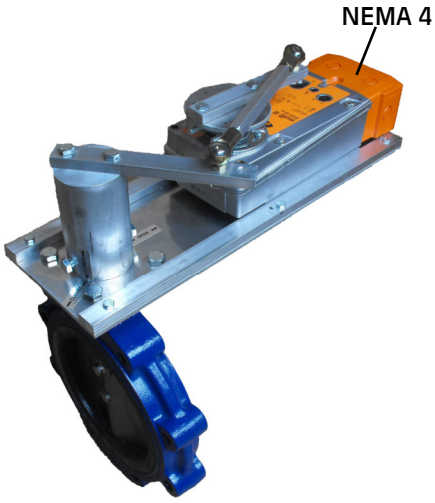

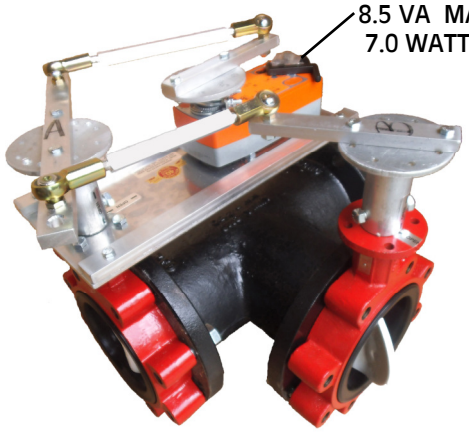

WESLEY VALVE CO.
MFGRS OF AUTOMATED BUTTERFLY VALVES
PHN: (404) 351-8744 FAX: (404) 351-9340
www.wesleyvalve.com