
USING LEVER ADVANTAGE TO INCREASE TORQUE AND IMPROVE CONTROL

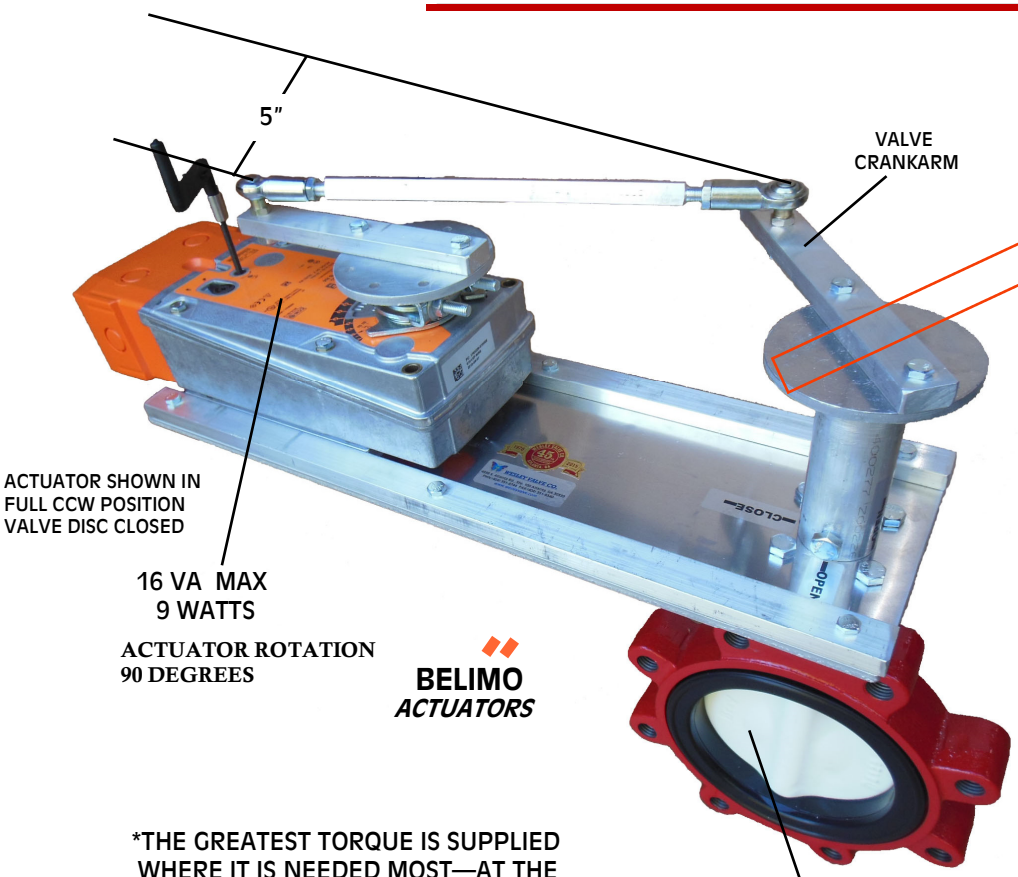

DIRECT COUPLED ACTION AS DESIGNED
BELIMO SERIES GMB SPRING RETURN ACTUATOR'S TORQUE RATING IS 270 IN. LB.


REMOTE ROTARY ACTION
BREAK-A-WAY TORQUEING ADVANTAGE IS X5 TO 1350 IN. LB.

VALVE MID POSIOTION TO OPEN
VALVE DISC AT MID POSITION TO OPEN—TORQUEING ADVANTAGE DECREASES AT WORST TO (1.5 TO 1) 540 IN. LB.

*THE GREATEST TORQUE IS SUPPLIED WHERE IT IS NEEDED MOST—AT THE BEGINNING OF VALVE MOVEMENT TO ASSURE BREAK-A-WAY FROM VALVE DISC RUBBER LINER SEAL

BY PROPORTIONATELY INCREASING ACTUATOR & VALVE CRANKARM LENGTHS THE MEASUREMENT SHOWN ASLO INCREASES THUS PROVIDING GREATER BREAK-A-WAY TORQUE

90 TO 60 DEG VALVE TURN ASSEMBLY INCREASES DISC REPOSITIONS (RESOLUTION) BY 50%

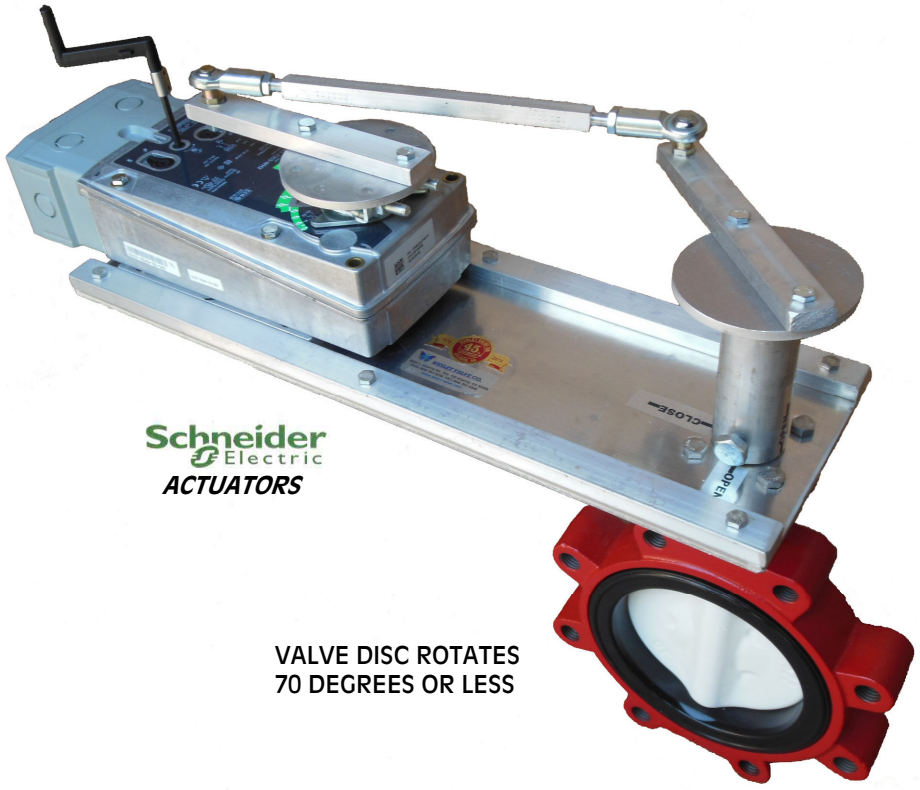

BUTTERFLY VALVE

2-WAY VALVE ASSEMBLY

FOR CHILLER HEAD PRESSURE CONTROL

SPRING RETURN VALVE ASSEMBLIES AVAILABLE 2" THROUGH 14"

WESLEY VALVE CO.
MFGRS OF AUTOMATED BUTTERFLY VALVES
PHN: (404) 351-8744 FAX: (404) 351-9340
www.wesleyvalve.com

File:Leverage&ResolutionInstr